




	Technical Specifications	Standard Requirements	Test Results
	Water Absorption UNI EN ISO 10545-03	$E \leq 0.5\%$	$\leq 0.5\%$
	Breaking Strength UNI EN ISO 10545-04	$\geq 1300 \text{ N}$	$\geq 1300 \text{ N}$
	Modulus of Rupture UNI EN ISO 10545-04	$> 35 \text{ N/mm}^2$	$\geq 35 \text{ N/mm}^2$
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: $E > 0.55$	$E > 0.55$
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm^3	Resistant
	Thermal Linear Expansion UNI EN ISO 10545-08	As Reported	$6.8 \times 10^{-4} / ^\circ\text{C}$
	Thermal Shock Resistance UNI EN ISO 10545-09	Required	Resistant
	Moisture Expansion UNI EN ISO 10545-10	As Reported	$\leq 0.1 \text{ mm/m}$
	Frost Resistance UNI EN ISO 10545-12	As Reported	Indoor Use
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: GB Acids and Alkalis: As Reported	LA HA
	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Class A
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	III
	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: > 0.42	N/A
	Shade Variation	As Reported	V2
	Thickness	As Reported	12' x 24" - 10 mm 24' x 24" - 9.5 mm
	Number of Screens	As Reported	12' x 24" - 6 24' x 24" - 6

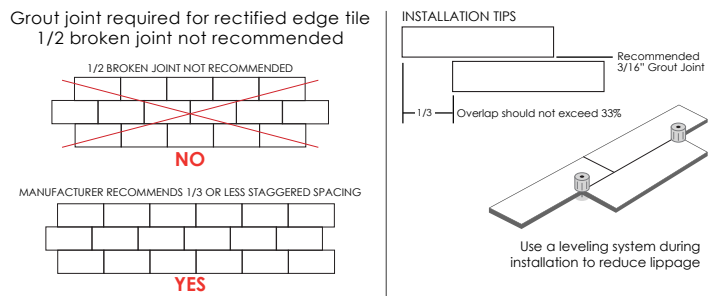

MARBLE

CHARLESTON

GLAZED PORCELAIN





FORMATS
ALL FORMATS AVAILABE IN NATURAL FINISH

WHITE




24" x 24"



12" x 24"



3" x 24" Bullnose



2" x 2" Mosaic
(12" x 12" Sheet)

CHARLESTON

Charleston is a soft, simplistic tile inspired by traditional marble looks. This collection utilizes white and grey tones with a touch of warmth to uplift the atmosphere of any living space. Charleston is perfect for any room with a minimal, classic style that still feels homely and inviting.

