

## Installation and Maintenance Instructions

When installing natural stone tiles, be sure to start with a smooth flat substrate that is free of divots, defects, or bumps. The veins in natural stone are inherent weak spots that can crack if installed over an imperfect substrate.


Use only high-bond, elastic adhesives. Make sure to get complete coverage to ensure proper setting. All substrates should be properly reinforced to prevent movement. For mortar installations, make sure the mortar bed has been properly cured and reinforced.

Once the substrate has fully cured per manufacturer specifications, it is recommended to apply a high-quality sealer to the tile surface. This will help prevent staining during grout application.

Please refer to the TCNA Handbook for more detailed installation instructions.

For regular cleaning, use a non-abrasive cloth and neutral detergents. Do not use abrasive cleaners, abrasive sponges, or cleaning agents with strong chemicals as this may damage the mosaics.

**Mosaics can be cut  
to make borders,  
accents, and  
inserts!**

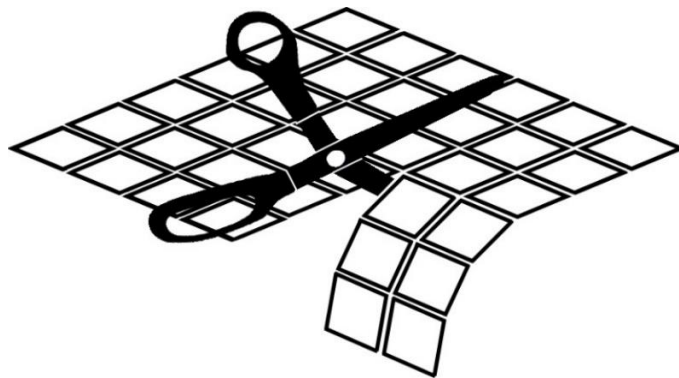

**DO NOT USE DARK GROUT OR SETTING MATERIAL WITH LIGHT COLORED NATURAL STONES AS THEY ARE POROUS AND CAN BE STAINED BY THEIR USE**

## **ATTENTION**

**THIS PRODUCT IS INTENDED FOR INDOOR USE ONLY. IT IS NOT APPROVED FOR USE IN:**

- SUBMERGED AREAS SUCH AS POOLS AND FOUNTAINS
- OUTDOOR APPLICATIONS OR AREAS SUBJECT TO FREEZE/THAW CONDITIONS

## Disclaimer:

End user must determine if product is suitable for the desired installation location. This includes both slip resistance and maintainability. We cannot be held liable in any cause of action resulting from product use in any form. Mosaics inherently lack uniformity and are subject to variations in aesthetics, color, shade, finish, tint, harness, strength, slip resistance, density, etc. After installation vendor disclaims any liabilities.