















	Technical Specifications	Standard Requirements	Test Results	
			NATURAL	POLISHED
	Water Absorption UNI EN ISO 10545-03	<0.5%	E<0,1%	
	Breaking Strength UNI EN ISO 10545-04	Minimum: 1300 N	1800-2400 N	
	Modulus of Rupture UNI EN ISO 10545-04	Minimum: 35 N/mm <sup>2</sup>	35-45 N/mm <sup>2</sup>	
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: e > 0,55	e 50,55 Resitution	
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm <sup>3</sup>	110-130 mm <sup>3</sup>	
	Thermal Linear Expansion UNI EN ISO 10545-08 n	Minimum for Floor Applications: Class 3	27x10.- 6°C	
	Thermal Shock Resistance UNI EN ISO 10545-09	Resistant	Resistant	
	Moisture Expansion UNI EN ISO 10545-10	As Reported	0,0%	
	Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant	
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/GB Acids And Alkalis: As Reported	UA ULC-UMC	
	Stain Resistance UNI EN ISO 10545-03	Minimum: Class 3	5	
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	PEI IV-	
COF	ASTM C 1028	For Level Interior Spaces Expected to be Walked Upon When wet: > 0.60	> 0.60-	
DCOF	(DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: > 0.42	> 0.42-	
	Thickness	As Reported	8"x 48"- 11 mm 6"x 36"- 11 mm	
	Number of Screens	As Reported	8"x 48"- 30 6"x 36"- 30	


1/2 BROKEN JOINT NOT RECOMMENDED



INSTALLATION TIPS



MADE IN SPAIN



HAPPY FLOORS



WWW.HAPPY-FLOORS.COM

# TASMANIA

## PORCELAIN

RAIN



RAIN



HAIL




FROST



RAIN





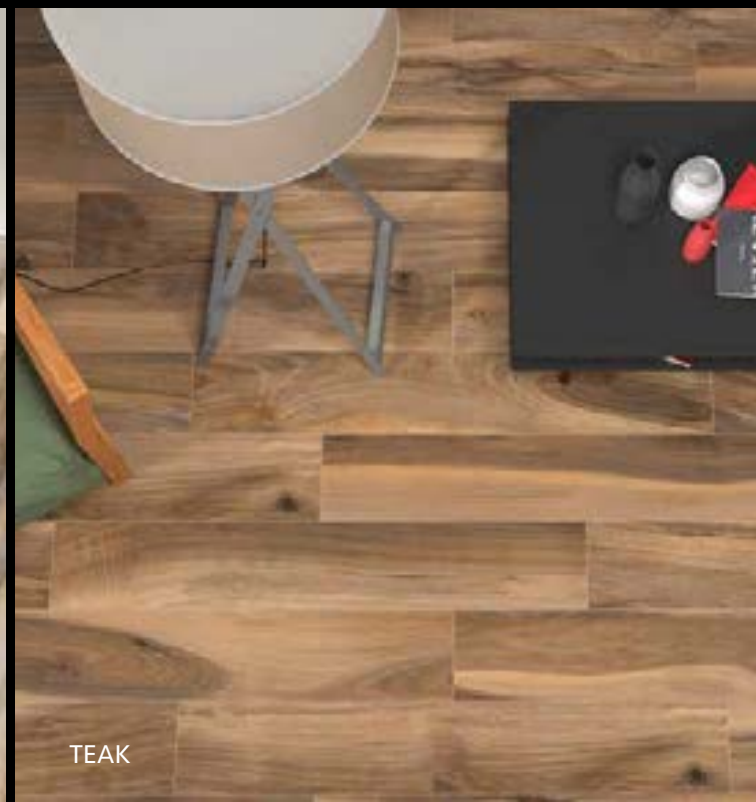


DRIFT



TEAK

### Tasmania Rain

	
8\" data-bbox="788 78 825 102"/>	3\" data-bbox="885 78 942 102"/>
	
6\" data-bbox="788 133 825 157"/>	Hexagon Mosaic Polished 10\" data-bbox="885 150 942 174"/>
	Hexagon Mosaic Natural 10\" data-bbox="885 177 918 217"/>
2\" data-bbox="813 160 870 184"/>	Hexagon Mosaic Natural 10\" data-bbox="885 180 942 204"/>
2\" data-bbox="813 187 868 211"/>	Net Coverage: 0.80 sqft

### Tasmania Hail

	
8\" data-bbox="788 274 825 298"/>	3\" data-bbox="885 274 942 298"/>
	
6\" data-bbox="788 329 825 353"/>	Hexagon Mosaic Polished 10\" data-bbox="885 344 942 368"/>
	Hexagon Mosaic Natural 10\" data-bbox="885 367 918 407"/>
2\" data-bbox="813 356 870 380"/>	Hexagon Mosaic Natural 10\" data-bbox="885 370 942 394"/>
2\" data-bbox="813 383 868 407"/>	Net Coverage: 0.80 sqft

### Tasmania Frost

	
8\" data-bbox="788 464 825 488"/>	3\" data-bbox="885 464 942 488"/>
	
6\" data-bbox="788 519 825 543"/>	Hexagon Mosaic Polished 10\" data-bbox="885 534 942 558"/>
	Hexagon Mosaic Natural 10\" data-bbox="885 557 918 597"/>
2\" data-bbox="813 546 870 570"/>	Hexagon Mosaic Natural 10\" data-bbox="885 560 942 584"/>
2\" data-bbox="813 573 868 597"/>	Net Coverage: 0.80 sqft

### Tasmania Drift

	
8\" data-bbox="788 655 825 679"/>	3\" data-bbox="885 655 942 679"/>
	
6\" data-bbox="788 710 825 734"/>	Hexagon Mosaic Polished 10\" data-bbox="885 713 942 737"/>
	Hexagon Mosaic Natural 10\" data-bbox="885 736 918 776"/>
2\" data-bbox="813 737 870 761"/>	Hexagon Mosaic Natural 10\" data-bbox="885 740 942 764"/>
2\" data-bbox="813 764 868 788"/>	Net Coverage: 0.80 sqft

### Tasmania Teak

	
8\" data-bbox="788 847 825 871"/>	3\" data-bbox="885 847 942 871"/>
	
6\" data-bbox="788 902 825 926"/>	Hexagon Mosaic Polished 10\" data-bbox="885 905 942 929"/>
	Hexagon Mosaic Natural 10\" data-bbox="885 928 918 968"/>
2\" data-bbox="813 929 870 953"/>	Hexagon Mosaic Natural 10\" data-bbox="885 932 942 956"/>
2\" data-bbox="813 956 868 980"/>	Net Coverage: 0.80 sqft