



MARENGO



PERLA



MARFIL

MARFIL



PERLA



MARENGO




PERLA



MARFIL

GRIS

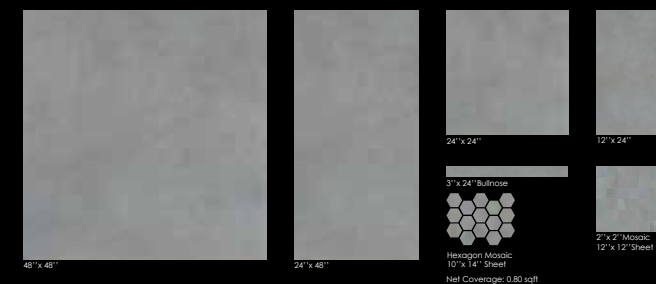


MARENGO





	Technical Specifications	Standard Requirements	Test Results
	Water Absorption UNI EN ISO 10545-03	<0.5%	0.1%
	Breaking Strength UNI EN ISO 10545-04	Minimum: 1300 N	1600-2400 N
	Modulus of Rupture UNI EN ISO 10545-04	Minimum: 35 N/mm <sup>2</sup>	35-45 N/mm <sup>2</sup>
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: e > 0,55	e 50,55 Restitution Coefficient
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm <sup>3</sup>	110-130 mm <sup>3</sup>
	Thermal Linear Expansion UNI EN ISO 10545-08 n	Minimum for Floor Applications: Class 3	27x10- 6°C
	Thermal Shock Resistance UNI EN ISO 10545-09	Resistant	Resistant
	Moisture Expansion UNI EN ISO 10545-10	As Reported	0,0%
	Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/CB Acids And Alkalis: As Reported	UA ULC-UMC
	Stain Resistance UNI EN ISO 10545-03	Minimum: Class 3	5
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	PEI IV
COF	Static Coefficient of Friction (COF) ASTM C 1028	For Level Interior Spaces Expec- ted to be Walked Upon When wet: > 0,60	DRY: >0,60 WET: >0,60
DCOF	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expec- ted to be Walked Upon When wet: > 0,42	> 0,42
	Shade Variation Not Available	As Reported	V1
	Thickness Not Available	As Reported	12" x 24" / 24" x 24" - 9,5 mm / 24" x 48" - 10,5 mm 48" x 48" - 10,7 mm
	Number of Screens Not Available	As Reported	12" x 24"- 12 / 24" x 48"- 8 / 24" x 24"- 6 / 48" x 48"- 4

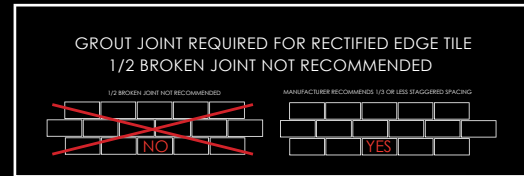

The data refers to first choice material in the natural version



ETNA  
RECTIFIED FULL BODY PORCELAIN



GRIS