




	Technical Specifications	Standard Requirements	Test Results - Natural	Test Results - 2 CM Paver
	Water Absorption UNI EN ISO 10545-03	E ≤ 0.5%	< 0.5%	< 0.5%
	Breaking Strength UNI EN ISO 10545-04	≥ 1300 N	> 2400 N	> 5000 N
	Modulus of Rupture UNI EN ISO 10545-04	≥ 35 N/mm ²	> 45 N/mm ²	> 45 N/mm ²
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: E > 0.55	Resistant	Resistant
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm ²	Resistant	Resistant
	Thermal Linear Expansion UNI EN ISO 10545-08	As Reported	7.5 x 10 ⁻⁴ /°C ⁻¹	7.5 x 10 ⁻⁴ /°C ⁻¹
	Thermal Shock Resistance UNI EN ISO 10545-09	Required	Resistant	Resistant
	Moisture Expansion UNI EN ISO 10545-10	As Reported	< 0.1 mm/m	< 0.1 mm/m
	Frost Resistance UNI EN ISO 10545-12	Required	Resistant	Resistant
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/GB, Acids and Alkalis: As Reported	Complies with the Standard	Complies with the Standard
	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Class 5	Class 5
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	IV	IV
	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: ≥ 0.42	> 0.65 R11	> 0.65 R11
	Shade Variation	As Reported	V2	V2
	Thickness	As Reported	12" x 24" - 9 mm 24" x 24" - 9 mm 24" x 48" - 9 mm	24" x 24" - 20 mm
	Number of Screens	As Reported	12" x 24" - 56 24" x 24" - 28 24" x 48" - 14	24" x 24" - 9

IMPORTANT

Please note that installing in a 50% staggered configuration is not recommended. We suggest the following 1/3 overlap installation method:

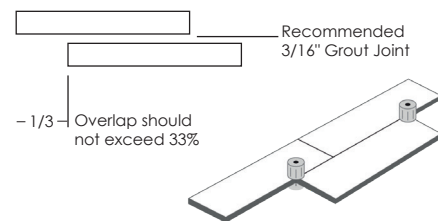

Use a Leveling system during installation to reduce lippage



Beige



CORALINA
RECTIFIED GLAZED PORCELAIN



CORALINA



Blanco

Perla

Beige

Perla

Perla



CORALINA

Coralina, a porcelain tile collection inspired by the ancient beauty of Coralina limestone, a stone that has witnessed the world's creation and evolution. This collection captures the limestone's unique furrows, time-worn marks, and distinctive veins in stunning detail.

Crafted with advanced technology, **Coralina's** sophisticated glaze not only enhances its visual appeal but also provides advanced skid-inhibiting properties, making it an ideal choice for wet areas like master baths.

BLANCO



24" x 48"




12" x 24"

PERLA



24" x 48"



12" x 24"

BEIGE



24" x 48"



12" x 24"



24" x 24"



24" x 24"
(3/4" Thick)
Paver



24" x 24"



24" x 24"
(3/4" Thick)
Paver



24" x 24"



24" x 24"
(3/4" Thick)
Paver



2" x 2" Mosaic
12" x 12" Sheet



3" x 24"
Bullnose



2" x 2" Mosaic
12" x 12" Sheet



3" x 24"
Bullnose



2" x 2" Mosaic
12" x 12" Sheet



3" x 24"
Bullnose



Beige



Blanco