





	TECHNICAL CHARACTERISTICS	REFERENCE STANDARD	REQUIRED VALUE	AVG. VALUE
	DIMENSIONS	ISO 10545-2	Compliant	Compliant
	WATER ABSORPTION	ISO 10545-3	≤0,5 %	<0,1%
	MODULUS OF RUPTURE	ISO 10545-4	MODULUS OF RUPTURE R ≥ 35 N/mm ² BREAKING STRENGTH S ≥ 1300 N	R>50 N/mm ² S>2500 N
	SCRATCH RESISTANCE	ISO 10545-7	0 - V	IV
	LINEAR THERMAL EXPANSION	ISO 10545-8	≤ 9x10 ⁻⁵ °C ⁻¹	6x10 ⁻⁵ °C ⁻¹
	THERMAL SHOCK RESISTANCE	ISO 10545-9	Resistant	Resistant
	FROST RESISTANCE	ISO 10545-12	Resistant	Resistant
	ACID AND ALKALI RESISTANCE	ISO 10545-13	CLASS GB MIN.	Low concentr. GLA High concentr. GHA
	CHEMICAL RESISTANCE	ISO 10545-13	CLASS GB MIN.	GA
	STAIN RESISTANCE	ISO 10545-14	CLASS 3 MIN.	5

	FRICTION COEFFICIENT (SLIPPERINESS)	BCR - Italia DM del 14-06-89			ASTM - USA ASTM C1028		DIN - Germania DIN 51130
		Dry rubber 0,62	Wet rubber 0,51	Dry leather 0,62	Dry neolythe 0,69	Wet neolythe 0,62	R9 ZH 1/571
<p>THE PRODUCTS HAVING AN ABSORPTION < 0,5% ARE CLASSIFIED ACCORDING TO THE UNI CEN STANDARDS "FULLY VITRIFIED TILES" AND ACCORDING TO THE ASTM STANDARDS "IMPERVIOUS TILES"</p>							

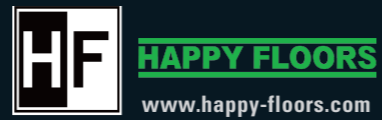

FITCH
FULL BODY PORCELAIN



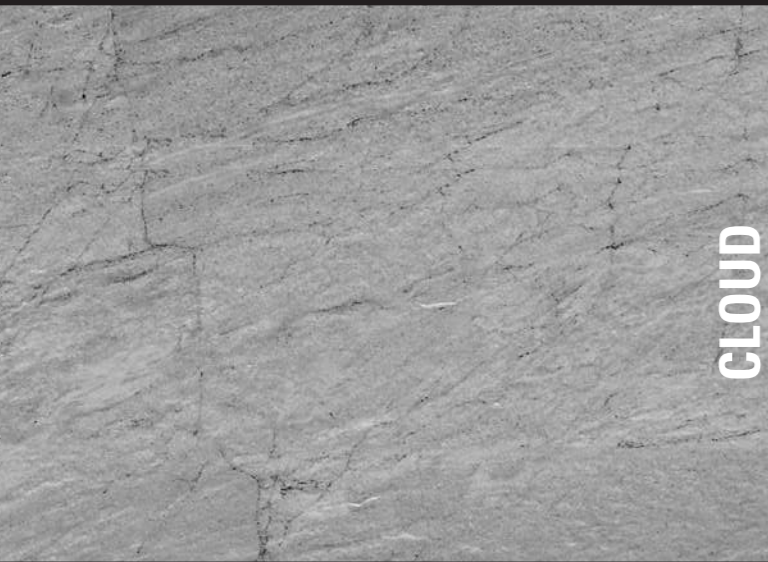

CLOUD



Cloud 12" x 24"



6" x 24"



20" x 20"

FITCH
FULL BODY PORCELAIN

Mosaic 2"x2"
(12"x12" sheet)



Cloud




Fawn



Rainbow

Universal Metal Corner 0,6" x 0,6"

Universal Metal Pencil 0,6" x 12"




Bullnose 3"x12"
(available in all colors)




6" x 24" 1/4 format




6" x 24" 1/3 format



6" x 24" 6cm/8cm alternate format




6" x 24"



YES 15%



NO 50%



FAWN



Fawn 12" x 24"



6" x 24"



20" x 20"




RAINBOW



Rainbow 12" x 24"



6" x 24"



20" x 20"

