




ABOVE: CREAM (FLOOR) CREAM & ICE (WALL)  
COVER: FROZEN (FLOOR) & ICE (WALL)

	Technical Specifications	Standard Requirements	Test Results Natural	Test Results Polished
	Water Absorption UNI EN ISO 10545-03	E ≤ 0.5%	< 0.8%	
	Breaking Strength UNI EN ISO 10545-04	≥ 1300 N	> 2200 N	
	Modulus of Rupture UNI EN ISO 10545-04	> 35 N/mm <sup>2</sup>	> 50 N/mm <sup>2</sup>	
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: E > 0.55	Resistant	
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm <sup>3</sup>	Resistant	
	Thermal Linear Expansion UNI EN ISO 10545-08	As Reported	< 7.5 x 10 <sup>-6</sup> /°C	
	Thermal Shock Resistance UNI EN ISO 10545-09	Required	Resistant	
	Moisture Expansion UNI EN ISO 10545-10	As Reported	N/A	
	Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant	
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: GB Acids and Alkalis: As Reported	Complies with the Standard	
	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Class 4-5	
<b>PEI</b>	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	IV	
	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: > 0.42	< 0.42	N/A
	Shade Variation	As Reported	V2	
	Thickness	As Reported	12" x 24" - 9 mm   24" x 24" - 9 mm   24" x 48" - 9 mm	
	Number of Screens	As Reported	12" x 24" - 48   24" x 24" - 24   24" x 48" - 12	


Grout joint required for rectified edge file  
1/2 broken joint not recommended



MANUFACTURER RECOMMENDS 1/3 OR LESS STAGGERED SPACING




#### INSTALLATION TIPS



Use a leveling system during installation to reduce lippage



**HAPPY FLOORS**

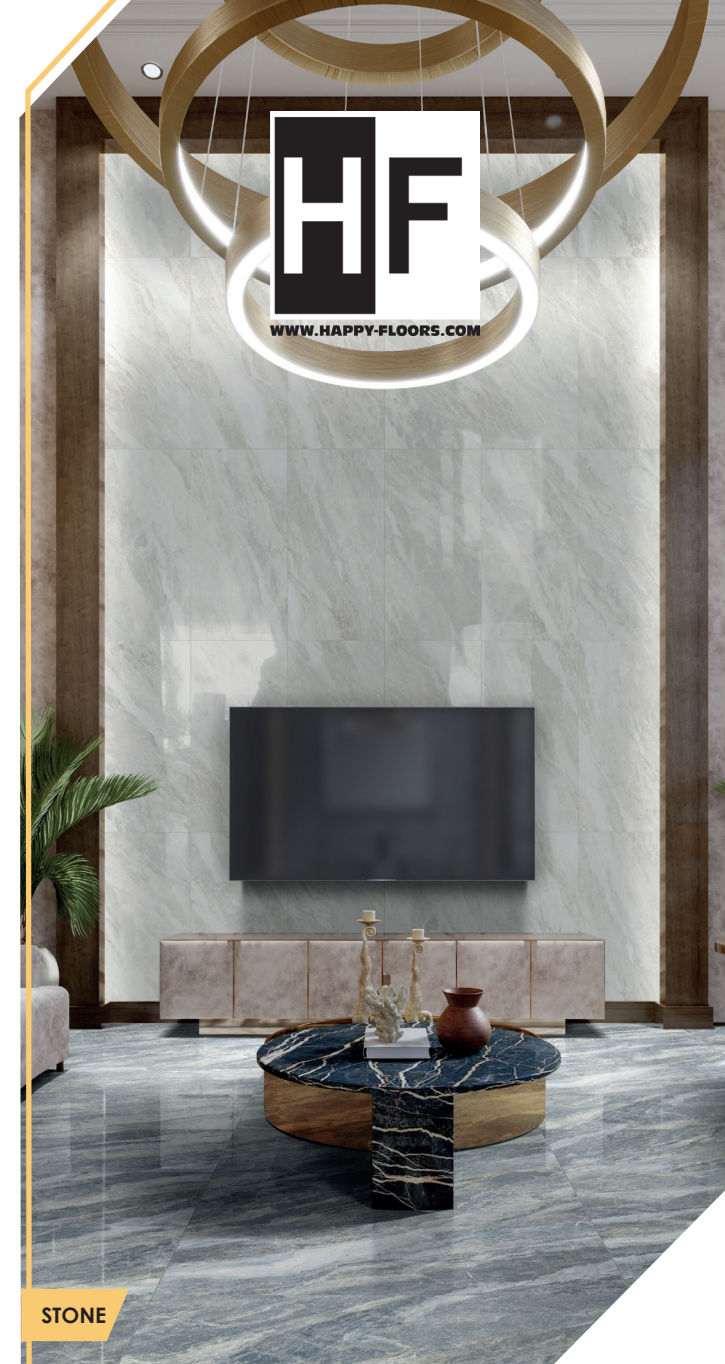

STONE



**BERNINI**

RECTIFIED PORCELAIN



# BERNINI

Bernini is an inventive, exquisite collection that rivals the high end feel of a stone look. With a range of colors and addition of a polished finish, this completes the collection's impressive design.

ICE



FROST

## FORMATS

ALL FORMATS AVAILABLE IN NATURAL AND POLISHED FINISH

### ICE



12" x 24"  
(Natural/ Polished)



24" x 24"  
(Natural/ Polished)



3" x 24" Bullnose  
(Natural/Polished)



24" x 48"  
(Natural/ Polished)




2" x 2" Mosaic\*  
12" x 12" Sheet



Hexagon Mosaic\*  
(10" x 14" Sheet)  
Net Coverage: 0.80 sqft

### CREAM



12" x 24"  
(Natural/ Polished)



24" x 24"  
(Natural/ Polished)



3" x 24" Bullnose  
(Natural/Polished)



24" x 48"  
(Natural/ Polished)



2" x 2" Mosaic\*  
12" x 12" Sheet



Hexagon Mosaic\*  
(10" x 14" Sheet)  
Net Coverage: 0.80 sqft

### FROST




12" x 24"  
(Natural/ Polished)



24" x 24"  
(Natural/ Polished)



3" x 24" Bullnose  
(Natural/Polished)

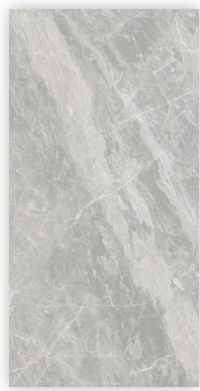

24" x 48"  
(Natural/ Polished)




2" x 2" Mosaic\*  
12" x 12" Sheet



Hexagon Mosaic\*  
(10" x 14" Sheet)  
Net Coverage: 0.80 sqft

### FROZEN



12" x 24"  
(Natural/ Polished)



24" x 24"  
(Natural/ Polished)



3" x 24" Bullnose  
(Natural/Polished)



24" x 48"  
(Natural/ Polished)



2" x 2" Mosaic\*  
12" x 12" Sheet



Hexagon Mosaic\*  
(10" x 14" Sheet)  
Net Coverage: 0.80 sqft

\*Polished Finish available by Special Order only on mosaics.



CREAM



FROZEN & ICE